



E14.5-GSK - Gas Strut Kit Standard Installation Details

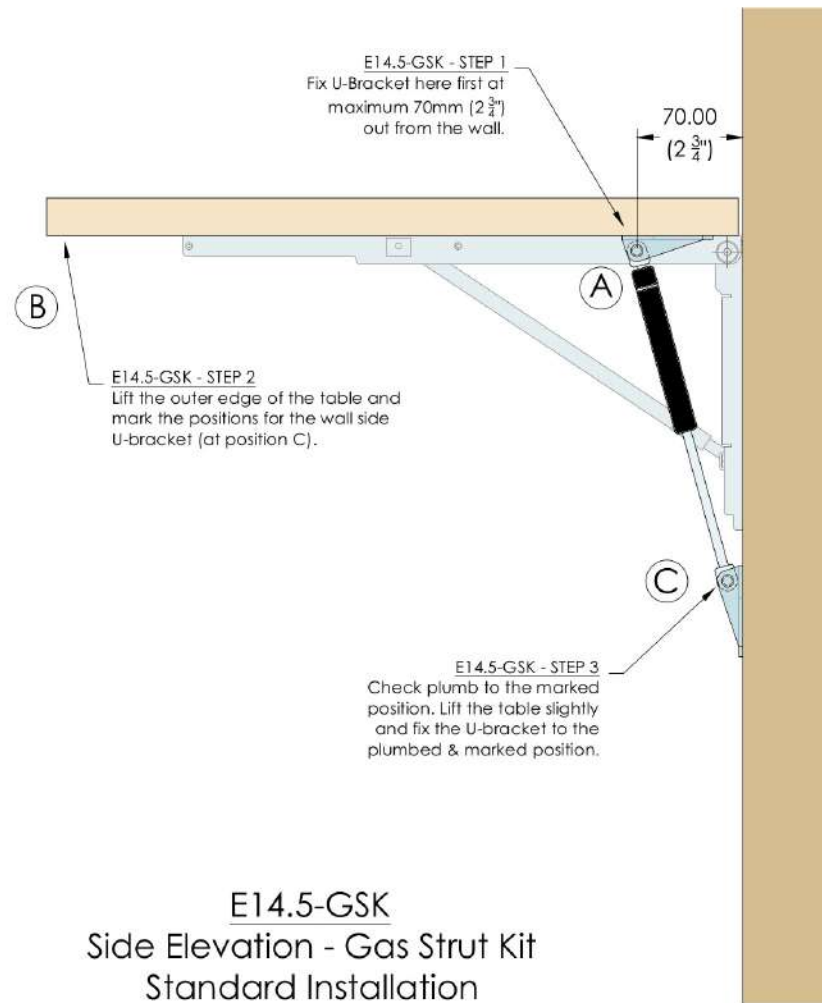

E14.5-GSK
Side Elevation - Gas Strut Kit
Standard Installation

Table in service Position

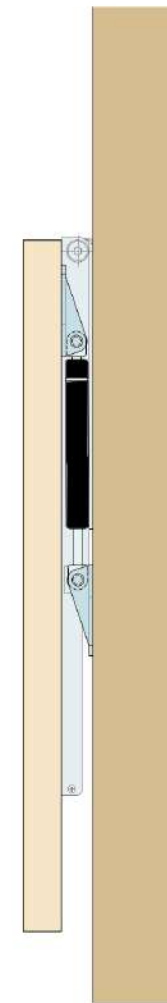


E14.5-GSK
Side Elevation - Gas Strut Kit
Standard Installation

Table in storage Position

Standard Installation - Applicable in most applications where the system is being fixed to an existing wall. The drawing shows the maximum point of fixing at position A. Fixing beyond the maximum point will result in the closing of the gas strut before the table folds down fully.

E14.5-GSK - Gas Strut Kit Rebated Installation Details

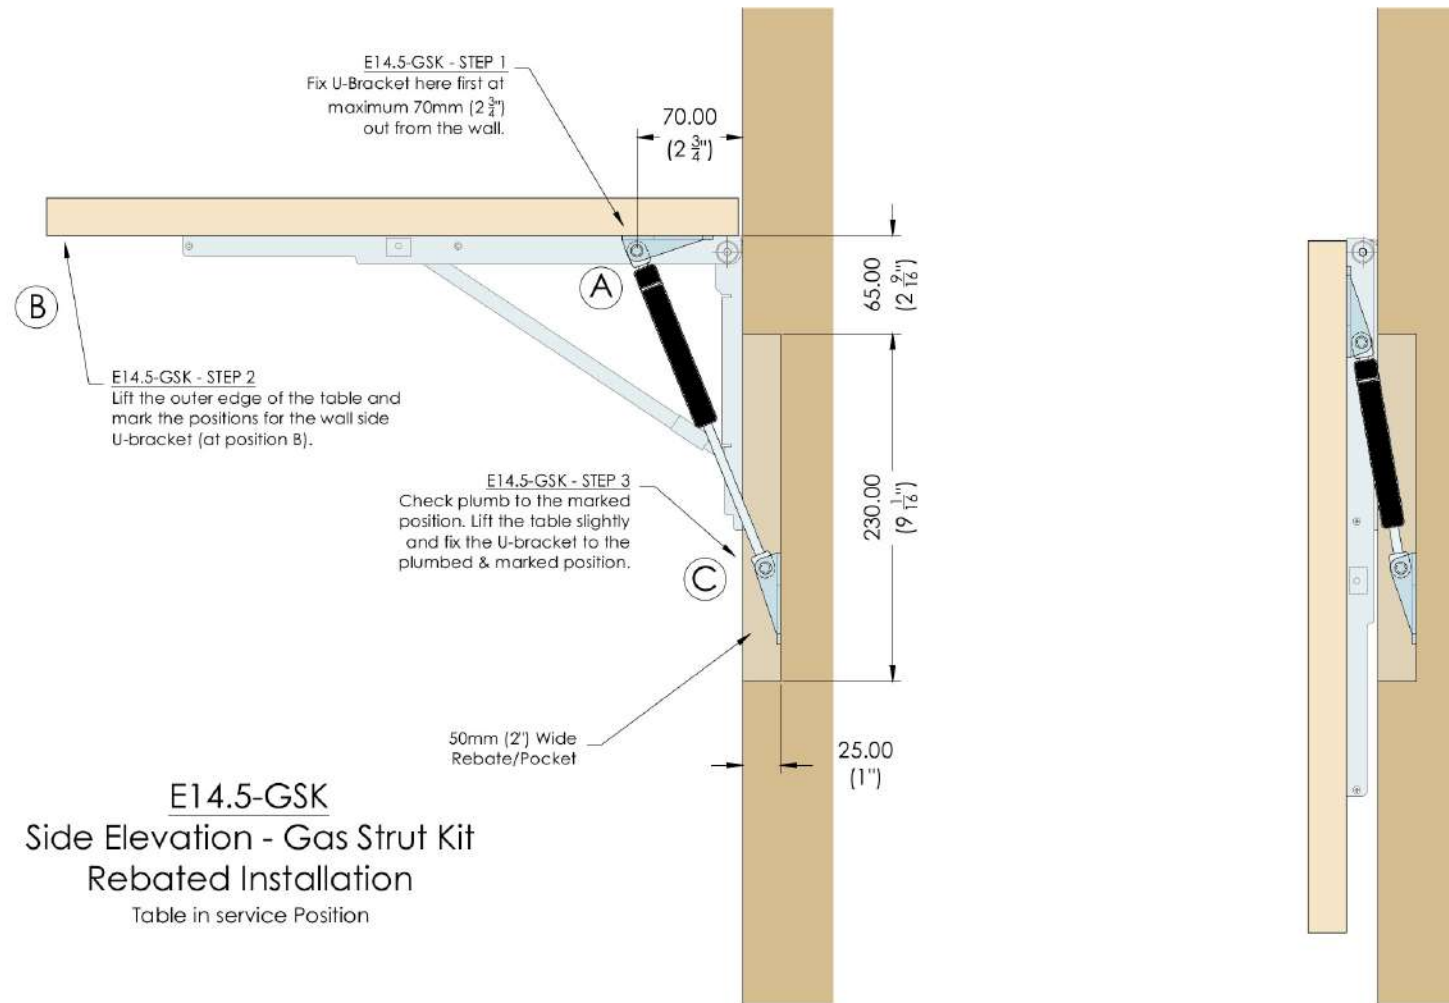

- Rebated Installation - Where the potential exists to provide a rebate/pocket behind the line of the brackets, it has been proven beneficial to set back the fixing position of the gas strut kit's wall bracket. The standard gas struts do not have added damping for the last 5 to 10 degrees of fall. By setting back the gas struts' wall bracket by 25mm (1"), it will create a softer closing in the last 5 to 10 degrees.